

Power Supply Docking Station

AS0158-HR-158



- ◆ Low SWaP Design
- ◆ No assembly or training required
- ◆ Rapid installation in fixed and semi-fixed environments
- ◆ Integrated Speaker
- ◆ Uninterrupted AC/DC Switchover

GENERAL

PTS Part No	AS0158-HR-158
Description	Harris 158 Single AC/DC Power Supply Docking Station
Compatibility	AN/PRC 158
Input Voltage	85-260 VAC (47-63 Hz) • 20-33 VDC
Output Voltage	26.5 VDC regulated
Output Noise and Ripple	200mV Max
Output Protection	33.6 V
AUX Output	N/A
Battery Backup	Supported via Mil-Std DC input connector

PHYSICAL

Dimensions	9.93" H X 15.8" W X 12.49" D
Weight	13 lbs.
Color / Finish	OLIVE - 34094
LED Indicators	AC/DC power indicator Rx indicator

ENVIRONMENTAL

Operating Temp	-20° to 70° C
Storage Temp	-20° to 75° C
Airborne Moisture	95% Non-Condensing


OPTIONAL PTS PRODUCTS

for AS0158-HR-158

Component	Part Number
-----------	-------------

7m Integrated Antenna Mast (IAM) -

ANT-RTL-307005-1-1

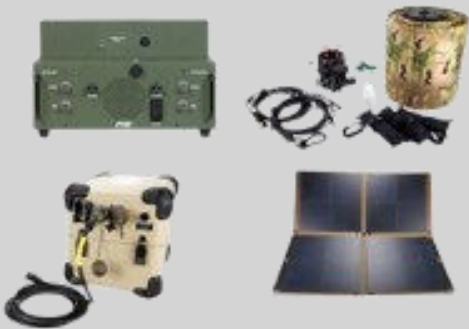

Component	Part Number
-----------	-------------

AS0158-HR-158 Deluxe Expeditionary

Ekit.158.Deluxe